


GAC-SPK Double Shielded

Speaker cable **2 x 4,00mm²**

Gotham Part Number 50041

Rev 2.0 per 16. September 2024 FA/gu

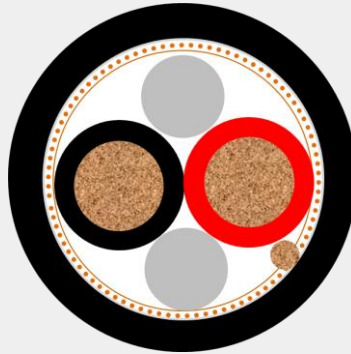

GAC-SPK 2x4.00mm² Shielded Speaker Cable

Construction

Conductor:	224x0,15mmØ bare OFC copper wires
Nominal Diameter	2,70mmØ 4,00mm²
INSULATION :	PVC – YI 1
Nominal Insulation Thickness	0,60mm
Nominal Insulation Dia.(mm.Ø)	3,90mmØ
COLOR CODE :	Black – Red
TWISTING :	Two cores and two filler twisted together Lay Lenght ~120mm
SHIELD :	
Shield No. 1	Conductive Fleece Foil
Drain Wire	16x0,19mmØ Cu (Ground) bare copper
Shield No. 2	Bare copper wires (0.15 mm) 100% coverage
JACKET :	
Nominal Jacket Thickness	PVC (YM2) 1.00mm.
Max. Diameter	10.30mm Ø
Color	Black
Pool Size:	100m (H-??) in Carton (spool gross weight 18.00 kg)
Crate:	28 spools in 1 palette
Printing:	50041 (xxx) ----- GAC-SPK Shielded Speaker Cable 2 x 4,00mm²----- www.gotham.swiss
Each of the 3 element	100cm distance

Technical specifications

CONDUCTOR RESISTANCE :	< 4.95 Ohm/km.
RATING VOLTAGE :	300/500 V
TEST VOLTAGE :	2'000 V
TEMPERATURE RANGE :	- 30° to +70°C

GOTHAM AG

Heimstrasse 27 - 3. Stock - CH 8953 Dietikon - Switzerland

Tel. +41(0) 44 / 840 01 44 - Fax: +41(0) 44 / 744 25 22

Web: <http://www.gotham.swiss> - Email: info@gotham.ch