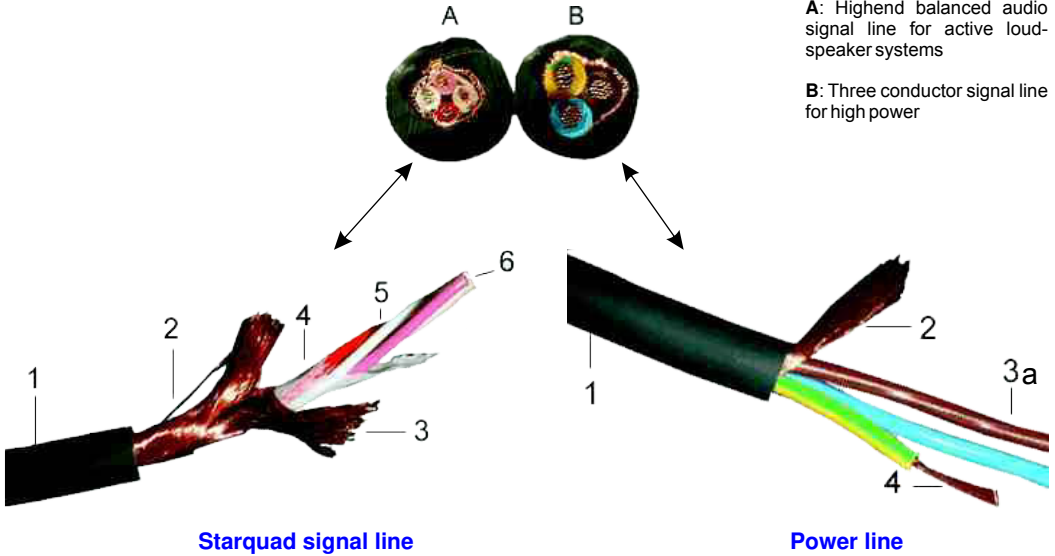


GAC-4/1 double shielded and 3x 0,75 mm² single shielded (11510)
Applications

A: Highend balanced audio signal line for active loud-speaker systems

B: Three conductor signal line for high power


Starquad signal line
Power line

1	Jacket	PVC, \varnothing 6.5, grey (dark)	A
2	Shield No. 1	Bare copper wires (0.10 mm), 100% coverage	A B
3	Shield No. 2	Bare copper wires (0.10 mm), 100% coverage	A
4	Viscose fiber coat	Counter wrapped to the quad conductors	A
5	Insulation	PE, \varnothing 1.20 mm, white, red, pink and ivory, quad-twisted	A
3a		PE, \varnothing 3.00 mm, high voltage tested	B
6	Conductor	Stranded bare copper wires, 7 x 0.20 mm (0.22 mm ²)	A
4		Stranded bare copper wires, 24 x 0.20 mm (0.75 mm ²)	B

Conductor resistance	< 80 Ohm /km	A	Charact. imped. at 20 kHz	80 Ohm	A
	< 30 Ohm /km	B	Test voltage cond/cond	500 V eff.	A
Shielding resistance	< 20 Ohm /km	A	Test voltage cond/shield	2000 V eff.	A
	< 30 Ohm /km	B		5000 V eff.	B
Cap. @ 800 Hz, cond/cond	< 55 nF /km	A	Operating voltage	Low voltage	A
Cap. @ 800 Hz, cond/shield	< 105 nF /km	A	Operating voltage	300 VAC	B

Order No.	Type	\varnothing mm	Color	Spool Size	Weight /Spool	Shipping Unit
11510	Hybrid Cable	6.5x13	grey	100 m	14.0 kg	2 x 100 m